
CYBER Series Projection Screen



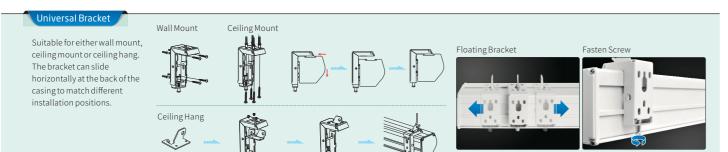

Power Relay

The emitter is installed at the projector end and the receiver is connected to the "EXT IR" plug on the screen, when the projector is triggered on/off the screen would open/close automatically.

RS485 Wall Switch

RS485 Wall Switch is an external screen controller, integrated with RS485 and USB interface, it can be connected to the "EXT CTRL" slot on the screen end to control the screen.


creen	

Specification

Driving System	Format	Specification (inch)	Viewing Area (WxH)	А	В3	Product Size (LxHxW)	Net Weight (Kg)	Power (voltage220v)
Intelligent Motorized Screen CB-MIxxx In-line Switch Motorized Screen CB-Mxxx	4:3	84	1710×1280	1529	80	1960	10.5	В
		100	2030×1524	1773	80	2280	13.8	В
		120	2400×1800	2049	80	2650	15.3	А
		150	3050×2286	2591	80	3316	27.5	A
		180	3620×2715	3020	80	3894	41	Α
		200	4020×3015	3320	80	4294	44	Α
	16:9	92	2030×1145	1964	650	2280	13.8	В
		100	2214×1245	1964	550	2464	14	В
		106	2340×1320	1989	500	2584	15.1	В
		120	2656×1494	2119	400	2924	16	А
Manual Screen CB-Pxxx	4:3	84	1710×1280	1514	80	1860	8.1	D
		100	2030×1520	1759	80	2200	10.5	С
		120	2340×1755	2010	80	2508	13.8	В
		150	2817×2110	2365	80	2991	17.6	В
	16:9	92	2030×1145	1809	500	2200	10.5	С
		100	2214×1245	2054	650	2388	12.7	В
		106	2340×1320	2049	570	2508	13.8	В
		120	2656×1494	2244	530	2830	15.8	В

- Unremarked measurements are default to be MM.
 Side borders B1 are both 50mm.
- 3. For recess-ceiling installation design,the length/width/heigth of the groove need to be added by 100mm/60mm/60mm respectively.

 4. Above parameters could be changed due to product improvement.



End Cap View











T: 86-20-84899499 F: 86-20-84805299

W: www.grandviewscreen.com





Grandview







CYBER Series Projection Screen

Fabric Features

Last-long Flatness

With four layer structure including Fiberglass, Stretchness less than 1% which ensures the last-long flatness

Sophisticated Images

Engraved with optical microgroove on the surface, with resolution more than 125 line pairs per mm, which ensures the sharpness of the projected images

Color Accuracy

The reflection light are evenly distributed with less than 60K difference between incident angle and reflection angle

•Wide Color Range

With high contrast processment, while maintaing the color accuracy and color range is widely presented to provided a more vivid image

Fabric Types




















Decelerating and Locking Mechanism China: ZL200510100943.2 U.S.: US7706067 Germany: 202006009545.4 France: 0606763 Japan: 3126248



Cyber Manual Screen with Speed Reduction

• Limitless Positioning • Slow Retraction

With Limitless Positioning Structure, the screen can be stopped by holding the handle for 3 seconds at any position.

issue cause by lower bar hitting casing.

Wrinkle Free

With Slow Retraction System When the screen is fully retracted to allow the screen retracting the positioning system is lock off back slowly within 8 seconds, and the fabric is not stretched by which can prevent the safety the spring system, which can prevent the wrinkle cause by long time stretchness from the spring

CYBER Series



Pull Down

the Screen









Hold for 3 seconds Evenly retract in 8 seconds



Suitable with Tubular Motor

Smooth Operation Accurate Positioning

Low Noise (≤45dB)

Cyber Motorized Screen

• In-line Switch with driect control and high stability Optional with IR / RF remote control







Cyber Integrated Motorized Screen

In-built with IR control function and designed with interfaces for wall switch and external central control to control the screen remotely and intelligently.






Wall Switch (Optional)

Connect the 6P6C plug of the wall switch to the "EXT CTRL" interface, user can choose net cable when the control distance











system through RS485 protocol